



Table of Contents

	The advantage of the system	3
Exclusive Grou	p - ARCTIC Plus / ARCTIC / PREMIUM lines	7
	Diplomat Collection	10
	Classic Collection	30
	Inspirations / custom solutions	36
Optimal Group - OPTIMAL/INTERIOR lines		
	Diplomat Collection	46
	Classic Collection	54
Technical Infor	rmation	58
	Colors	58
	Stained-glass windows	59
	Standard dimensions of doors	60
	Opening directions	6
	Sidelights variants	62
	Application variants of decorations and uni	its 63
Equipment		64
	BioKey	64
	Locks	65
	Locking plates	65
	Hinges	65
	Handles	66
	Pull handles	67
	Accessories	67
Compendium o	of knowledge	68
	Assembly	69
	Utilization	7
	Guarantees	73
PRICE LIST 20	15	74
	Doors	C2
	Custom realizations	C1
	Handles / Pull handles	C12
	Additional equipment	C13




PERFECT PROTECTION OF YOUR HOME



- effectively protect against the heat loss Ud factor from 0,63 W/m²K,
- Doors of ARCTIC Plus, ARCTIC, PREMIUM and OPTIMAL lines are standard equipped with multipoint anti-burglary strip locks,
- excellent resistance to vandalism and burglary RC II class according to the standard (PN-EN 1627:2011).
- ✓ protects against the noise of busy street,
- excellent test results carried out by the notified laboratories allow to turnover in the European Union.

TAILOR-MADE



- a wide range of top quality fittings and door accessories,
- doors adapted to custom building openings
- ✓ double doors,
- ✓ sidelights in various sizes and shapes,
- ✓ only in composite doors resistant to moisture PVC door frames with extensions system, connectors and sidelights in any configuration,
- ✓ on request frames from the highest quality meranti wood,
- rebate or non-rebated doors, opening to the outside or inside.

UNIQUE

- by using to production composite materials with unreachable for traditional materials parameters we set new trends in the quality and design of the front door,
- VIKKING composite doors are manufactured using advanced technologies that are protected by the international patents,
- innovative structural pasting of glass units, provides a stability of doors, safety and protection against loss of energy,
- ✓ composite doors with SMO OTH surface, or in its unique combination
- with the structure of the grain wood Real Wood in any configuration and color,
- ✓ innovative stained glass in unlimited design, hand-created in own studio by the best craftsmen,
- ✓ flexibility of combining colors in unlimited scope completes the uniqueness of composite doors VIKKING.

FUNCTIONAL

- ✓ maintenance of door kept to a minimum and is not complicated,
- ✓ paint coatings don't require periodic maintenance,
- ✓ specially developed, six-chamber PVC door frames Class A Plus have a unique surface of precious wood, in contrast to which they are completely resistant to moisture
- ✓ and don't require maintenance,
- ✓ surfaces of composite sashes are resistant to damage,
- composite doors have the optimal price-advantage ratio,
- each order is individually produced by experienced professionals, for whom customer satisfaction is the highest recognition.

SOLID

- composite doors have the aesthetics of wood, light weight of aluminium, resistance of steel and durability of PVC, are also free from defects associated to traditional materials,
- advanced technology, the highest quality components, fittings and coatings of renowned manufacturers provide many years of trouble-free operation,
- composite doors VIKKING are resistant to moisture and most difficult climatic conditions composite sashes don't deform under the influence of weather conditions, we can guarantee their constant technical durability for decades.








Construction of composite doors Vikking - 12 arguments for yes:

- 1. Innovative, six-chamber PVC door frame class A Plus with structured precious wood surface. PVC profiles are resistant to moisture, perfectly insulate from the cold and require no maintenance.
- Composite sash with specially reinforced construction which prevents deformation, even in difficult weather conditions; resistant to moisture and mechanical damage. Only composite sashes keep consistently high quality for decades without the need of maintenance and painting.
- 3. Sash linings made from the highest quality composite panels resistant to scratches and damage.
- 4. Solid multi-layer construction provides stability of the sash and burglar protection.
- 5. Waterproof composite frame protects the interior of the sash from moisture.
- CFC-free insulation provides excellent protection against the heat loss.
- 7. The highest quality coatings in any RAL colors or in one of the many wood grain decors combined with total resistance of composite doors to moisture makes them resistant in the extent of the reach of traditional materials.
- 8. Silicone seals designed specifically for composite doors, provide maximum protection against the heat loss around the perimeter and provide a pleasant sound when closing.
- 9. Low threshold with durable aluminium thermal barrier provides insulation from the external climate.
- 10. Heat-insulating subliminal profiles with warm assembly system provide a stable positioning of door eliminates thermal bridges and protects against moisture.
- 11. Specially designed and manufactured locking plates made of stainless steel provides full adjustment during the long-term usage.
- 12. System of multi-point locks and anti-theft blockades raises the level of burglary protection.

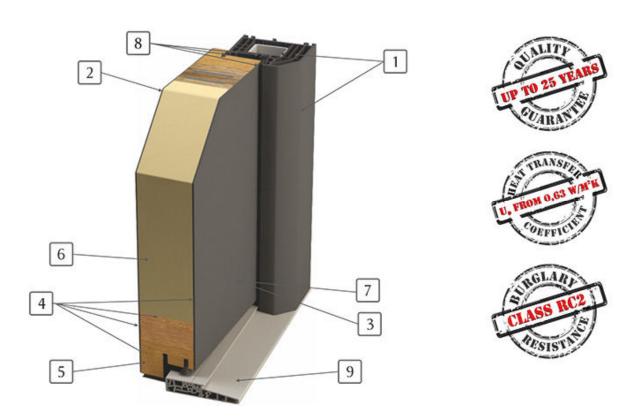

Composite doors Vikking - we are limited only by your imagination



We constantly develop and improve production processes, so that you can decide on the final design and accessories of your door of dreams.

No longer you don't have to agree to compromises!

Not all suppliers are able to meet the stringent requirements for the highest aesthetic of doors combined with the best protection of your home.

We have developed from the scratch innovative composite doors to meet your most demanding expectations.

Advanced technology and innovative solutions enable to make any door of your dreams without any concessions in quality and durability!

No other doors have as many advantages, without defects and limitations associated with traditional technologies, composite doors are resistant to adverse weather conditions, don't absorb the moisture, don't corrode and retain consistently high quality for decades.

For years, our motto is:

"What for others is unusual - we treat it as a standard, what for others is impossible - we make it tomorrow".

VIKKING from many years is specializing in the implementation of most custom orders.

Unleash your creativity from the threshold and start by changing the door.

Choose your style, any combination of colors and surface textures of doors, choose most convenient handles and beautiful stained glass windows, we will take care of the rest with the greatest reverence.

To ensure the transparency of our extremely rich offer, this publication will make it easy to choose the door by division them on lines, collections, models and equipment.

Five lines, two collections, number of models and stained glass designs limited by the imagination are undoubted advantages of the system of composite doors VIKKING.

For your convenience - **NEW INFORMATION SYSTEM**

C C the requ	uct meets irements iropean Union	68mm	Sash thickness	PL s	Stainless steel finish strip
0,63 insulation	ent of thermal on 53 W/m²K	S	Rebate system	LC	Stainless steel plinth strip (finish, height 90 mm)
	glar according N 1627:2011	S	Non-rebated system	RZ s	Stainless steel flush frame
The requirement of a full	irement door roofing	\gtrsim_s	Triple sealing system	RN	Stainless steel finish frame
	ee chnical efficiency mposite sash	1111 ₅	Quadruple glazing units	KZ s	External composite frame
RW Sash sur	face Real Wood good	S	Super Spacer warm edge between the glass	KWs	Internal composite frame
SMOOTH SMOOT) (c	Soundproofing	ZW	The system on both sides frameless
RAL colo		F _s	Milled surface decoration of the sash - one-sided	RR	Decorative frame of the classic collection
Colors in grain de		FL	Stainless steel flush strip	Caption s - standard o - option N/D - not a	







PASSIVE QU

LITY ENER



ARCTIC Plus line



Composite doors of ARCTIC Plus line - the quintessence of timeless design, excellent quality and legendary resistance to climatic conditions. These doors set new standards of energy losses reduction and conservancy of natural resources.

As the only one in its class - do not require door roofs!

You no longer need to be held hostage to the limitations identical to the traditional door!

Modern design combined with the perfection of form and the most beautiful stained glass decorations underline the uniqueness of ARCTIC Plus door.

Excellent protection against heat loss - and the most favorable pricequality ratio, make them unrivaled in the world elite group of passive door.

Purpose:


- ✓ Exterior doors opening to the outside or inside,
- Dedicated to the zero-energy and passive buildings.

Standard equipment:

- composite sash 68 mm from the DIPLOMAT collection in the rebate version of wood-like surface Real Wood structure, optional: with SMOOTH surface, or in any combination of both surfaces - see price list,
- PVC door frame 85 mm NEW! made of six-chamber profile class A Plus of wood-like surface Real Wood structure or a SMOOTH surface,
 - optional: door frame of the highest quality meranti wood 85mm \upbeta 75mm see price list,
- door set finally painted with the highest quality lacquers in the full range of RAL colors or in one of the wood decors, optional: painting in several freely configurable colors according to the order - see price list,
- low aluminium threshold with thermal barrier, optional: with the system of insulating profiles - see price list,
- Four 3D adjustable hinges with increased resistance to burglary,
- ✓ anti-theft blockade system,
- three-point anti-theft strip lock, lockable by handle or automatic lock,
- ✓ a set of adjustable locking plates made of stainless steel
- triple sealing system around the edges,
- ✓ wind stop seal in threshold part of the frame,
- in versions with glazing: quadruple glazing units with system of warm edge Super Spacer.

Optional: custom projects - see price list.

Dedicated fittings and equipment: see price list.

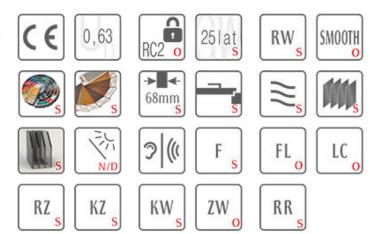





By saving energy, we care about the future generations.

ARCTIC Line



ARCTIC line - doors designed for demanding customers and those, who appreciate quality. Top class fittings and equipment complement this unique offer of door with excellent aesthetic and functional parameters. Door in connection with the PVC door frame are completely resistant to moisture.

They do not require roofs to protect them from rain. Protection factor against heat loss – $U_{\scriptscriptstyle D}$ from 0,81 W/m 2 K.

Purpose:

- Exterior doors opening to the outside or inside,
- Perfect for energy-efficient or passive single-family

Standard equipment:

- ✓ composite sash 60 mm in the rebate version of wood-like surface Real Wood structure optional: with SMOOTH surface, or in any combination of both surfaces - see price list,
- PVC door frame 70 mm made of six-chamber profile class A of wood-like surface Real Wood structure or a SMOOTH surface. optional: door frame of the highest quality meranti wood 85mm x 75mm - see price list,
- door set finally painted with the highest quality lacquers in the full range of RAL colors or in one of the wood decors. optional: painting in several freely configurable colors according to the order - see price list,
- low aluminium threshold with thermal barrier, optional: with the system of insulating profiles - see price list,
- three 3D adjustable hinges with increased resistance to burglary,
- anti-theft blockade system,
- three-point anti-theft strip lock, lockable by handle or automatic lock.
- a set of adjustable locking plates made of stainless
- double sealing system around the edges
- in versions with glazing: triple glazed units with system of warm edges Super Spacer.

Optional: custom projects - see price list. Dedicated fittings and equipment: see price list.





























PREMIUM Line



Composite doors of PREMIUM line is the broadest offer for those, who seeking excellent quality products that will protect your home for many years. In addition to the numerous functional and technical advantages the doors of this line are distinguished by the widest range of available sizes, colors, glazings, fittings and equipment at no extra hidden costs.

Protection factor against heat loss - Up from 0,85 W/m2K.

Purpose:

- ✓ External or internal entrance doors, opening to the outside or inside,
- Perfect for energy-efficient houses.

Standard equipment:

- ✓ composite sash 45 mm in the rebate version of wood-like surface Real Wood structure optional: with SMOOTH surface, or in any combination of both surfaces - see price list,
- PVC door frame 70 mm made of six-chamber profile class A of wood-like surface Real Wood structure or a SMOOTH surface, optional: door frame of the highest quality meranti wood 85mm x 65mm - see price list,
- door set finally painted with the highest quality lacquers in the full range of RAL colors or in one of the wood decors, optional: painting in several freely configurable

colors according to the order - see price list,

- low aluminium threshold with thermal barrier, optional: with the system of insulating profiles - see price list,
- three 3D adjustable hinges with increased resistance to burglary,
- anti-theft blockade system,
- three-point anti-theft strip lock, lockable by handle, optional: automatic lock - see price list,
- a set of adjustable locking plates made of stainless
- double sealing system around the edges,
- in versions with glazing: triple glazed units with system of warm edges Super Spacer.

Optional: custom projects - see price list. Dedicated fittings and equipment: see price list.



25lat



























Model: DIPLOMAT 2D

Color: Dark Oak Sash surface: RW

Door handing: Right to outside

Lock: 3-point strip lock lockable by cylinder

Hinges: adjustable 3D in color of fittings

Stained glass: 1.2-00-D/F/D

Variant of application: RZ+F

Fittings: pull handle P45B / handle Lord / rosette (color: F9)

Flush INOX frames - the essence of elegance

Catalog of composite doors 2015



New! Size XXL now even 1095 mm # 2210 mm



Electronic door viewer the guard of your home



Model: DIPLOMAT Oi Color: Golden oak / RAL 9005 - optional

Sash surface: RW + SMOOTH

- optional

Door handling: Right to outside Lock: 3-point strip lock lockable by handle Hinges: adjustable 3D in color of fittings Variant of application: F Fittings: handle Lord (F9)



Diplomat S Color: RAL7047 Sash surface: SMOOTH Fittings: handle Lord (F9)



Diplomat 9 Color: RAL 7038 Sash surface: SMOOTH Variant of application: F Fittings: pull handle P45 handle Lord / rosette (F9)



Diplomat OB Color: RAL7035 Sash surface: RW Variant of application: F Fittings: handle Baron (F9)



Diplomat O F Color: RAL 7003 Sash surface: RW Variant of application: F Fittings: pull handle P45 handle Lord / rosette (F9)



Diplomat OG
Color: RAL 7021
Sash surface: RW
Variant of application: FL
- optional
Fittings: pull handle Q45

handle Baron / rosettes (F9)



Diplomat OH Color: RAL 8001 Sash surface: RW Variant of application: F Fittings: handle Lord (F9)





Model: DIPLOMAT ON

Sidelight: wariant II Color: RAL 8023 Sash surface: RW

Door handling: Right to outside

Lock: 3-point strip lock lockable by cylinder

Hinges: adjustable 3D in color of fittings Stained glass: individual project

Variant of application: F

Fittings: pull handle P45 / handle Lord / rosette (F9)



Diplomat 0J Color: RAL 7032 Sash surface: RW Variant of application: F Fittings: handle Baron (F9)



DIPLOMAT OK Color: RAL7016 Sash surface: SMOOTH Variant of application: F Fittings: handle Lord (F9)



Diplomat OL Color: RAL 5014 Sash surface: RW Variant of application: F Fittings: handle Baron (F9)



Diplomat 0M Color: RAL7039 Sash surface: SMOOTH Variant of application: F Fittings: handle Baron (F9)





Diplomat OP Color: RAL7046 Sash surface: SMOOTH Variant of application: F Fittings: handle Baron (F9)





Model: DIPLOMAT 20

Color: Walnut Sash surface: RW

Door handling: Left to outside

Lock: **3-point strip lock** lockable by door handle Hinges: **adjustable 3D** in clolr of fittings

Stained glass: 3.1-24-T/D/T

Variant of application: RN Fittings: handle Baron (F9)



Diplomat 21
Color: RAL 9016
Sash surface: RW
Stained glass: 1.2-00-D/T/D
Variant of application: RN+LC
(LC- optional)

Fittings: pull handle P45B handle Lord / rosette (F92-



Diplomat 28
Color: RAL 9006
Sash surface: SMOOTH
Stained glass: 3.1-100-D/T/D
Variant of application: RN
Fittings: pull handle P45B
handle Lord / rosette (F9)



Diplomat 2A Color: Orzech Sash surface: RW Stained glass: 1.2-00-D/T/D Variant of application: RN Fittings: handle Lord (F9)




Diplomat 2D
Color: Gemny orzech
Sash surface: RW
Stained glass: 1.2-00-D/T/D
Variant of application: RZ+F
Fittings: pull handle P45B
handle Lord / rosette (F9)



Diplomat 2E
Color: Golden oak / RAL7000
- optional
Sash surface: RW + SMOOTH
- optional
Stained glass: 3.1-122-D/T/D

Variant of application: RZ+F

Fittings: handle Baron (F9)







Model: DIPLOMAT 30

Color: RAL3003/9016

- optional

Sash surface: RW

Door handling: Left to outside

Lock: 3-point strip lock lockable by door handle Hinges: adjustable 3D in color of fittings


Stained glass: 3.2-77-T/D/T

Variant of application: RN

Fittings: handle Baron (F9)



Diplomat 2H Color: RAL 7036 Sash surface: RW Stained glass: 3.1-103-D/T/D Variant of application: KW+F Fittings: handle Baron/rosettes (F9)



Diplomat 2i Color: RAL 3003/9016


- optional

Sash surface: SMOOTH Stained glass: 3.2-77-T/D/T Variant of application: KW+F



Diplomat 2G Color: RAL5010 Sash surface: SMOOTH Stained glass: 3.1-120-D/T/D Variant of application: KW+FL+F Fittings: handle Baron/rosettes (F9)

Dedicated stained glass

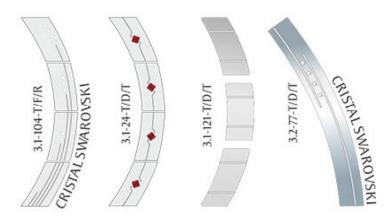



Diplomat 2F Color: RAL 8001 Sash surface: RW Stained glass: 3.1-121-D/T/D Variant of application: RZ+F Fittings: pull handle P45B handle Lord / rosette (F9)





Model: DIPLOMAT 1D

Color: Winchester / RAL 7016 Sash surface: RW + SMOOTH

- optional

Door handling: Right to outside

Lock: 3-point strip lock lockable by cylinder

- optional

Elektric door strike - optional

Hinges: adjustable 3D in color of fittings

Stained glass: 2.2-07-F/D/F Variant of application: KW+FL

optional

Fittings: pull handle Q45 / handle Baron / rosette (color F9)



Diplomat 4W
Color: RAL 5023/RAL 5011
- optional
Sash surface: SMOOTH
Stained glass: 6.1-105-T/D/T
Variant of application: KW+F
Fittings: handle Baron (F9)



Diplomat 4X Color: Walnut Sash surface: RW Stained glass: 3.1-128-D/T/D Variant of application: KW+F Fittings: handle Baron (F9)



Diplomat 4Y
Color: RAL 5023
Sash surface: SMOOTH
Stained glass: 6.1-114-T/F/R
Variant of application: KW+F
Fittings: handle Baron (F9)



Diplomat 4Z Color: RAL7040 Sash surface: RW Stained glass: 3.1-119-D/T/D Variant of application: KW Fittings: pull handle P45 handle Lord / rosette (F9)



Diplomat 5C Color: RAL 9016 Sash surface: SMOOTH Stained glass: 3.1-128-D/T/D Variant of application: KW+F Fittings: pull handle P45 handle Lord / rosette (F9)



Diplomat 5D
Color: Złoty dąb/RAL 7016
- optional
Sash surface: RW+SMOOTH
- optional
Stained glass: 3.1-128-D/T/D
Variant of application: KW+F
Fittings: pull handle P45

handle Baron / rosette (F9)







Model: DIPLOMAT 14 Color: RAL7021

Sash surface: RW
Door handling: Left to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings

Stained glass: 3.1-35-D/T/D Variant of application: KW+PL Fittings: handle Lord (color F9)




Diplomat 5G Color: RAL 6022 Sash surface: RW Stained glass: 3.1-35-D/T/D Variant of application: KW+F Fittings: pull handle P45 handle Baron / rosette (F9)



Diplomat 5E Color: RAL 5014 Sash surface: SMOOTH Stained glass: 1.2-00-D/F/D Variant of application: KW+F Fittings: pull handle P45 handle Baron / rosettes (F9)

Dedicated stained glass

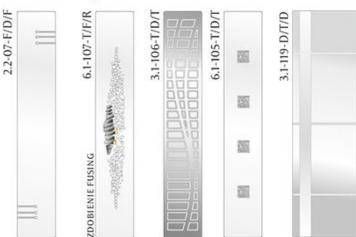



Diplomat 5i Color: RAL 7036 Sash surface: SMOOTH Stained glass: 1.2-00-D/F/D Variant of application: ZW+F Fittings: pull handle P45 handle Baron / rosette (F9)



Diplomat 5J Color: RAL 7036 Sash surface: SMOOTH Stained glass: 1.2-00-D/F/D Variant of application: ZW+F Fittings: pull handle P45 handle Baron / rosette (F9)





Model: DIPLOMAT 4U
Color: RAL 9007
Sash surface: SMOOTH
Door handling: Left to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 3.1-35-D/T/D
Variant of application: RN
Fittings: handle Lord (color: F9)



Diplomat 42 Color: RAL 9016 Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RN Fittings: handle Lord (white)



Diplomat 43 Color: RAL 7016 Sash surface: RW Stained glass: 3.1-126-T/D/T Variant of application: RN Fittings: handle Lord (F9)



Diplomat 45 Color; Orzech Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RN Fittings: handle Lord (F9)



Diplomat 46 Color: Włoski orzech Sash surface: RW Stained glass: 3.1-112-T/D/T Variant of application: RN Fittings: handle Baron (F9)



Diplomat 48 Color: RAL 7035 Sash surface: SMOOTH Stained glass: 1.2-00-D/F/D Variant of application: RN Fittings: handle Baron (F9)



Diplomat 5H Color: RAL 7044 Sash surface: SMOOTH Stained glass: 3.1-106-T/D/T Variant of application: KW+F Fittings: handle Baron (F9)









Color: RAL 7021 Sasjh surface: RW

Door handling: Right to outside

Lock: 3-point strip lock lockable by cylinder

-optional

Mechanical locking plate - optional Hinges: adjustable 3D in color of fittings

Stained glass: 1.2-00-D/T/D

Variant of application: RN

Fittings: pull handle Q45 / handle Lord / rosette (color: F9)




Diplomat 4i Color: Gemny orzech Sash surface: RW Stained glass: 3.1-35-D/T/D Variant of application: RN Fittings: handle Baron



Diplomat 4J Color: RAL7021 Sash surface: RW Stained glass: 1.2-00-D/T/D Variant of application: RN Fittings: handle Lord (F9)

SMOOTH

Dedicated stained glass







Diplomat 4K Color: RAL7016 Sash surface: SMOOTH Stained glass: 1.2-00-D/T/D Variant of application: RN Fittings: handle Lord (F9)

Catalog of composite doors 2015





Model: DIPLOMAT 4M Color: Orzech Sash surface: RW

Stained glass: 3.1-128-D/T/D
Door handling: Left to outside

Lock: **3-point strip lock** lockable by handle Hinges: **adjustable 3D** in color of fittings

Variant of application: RN Fittings: handle Baron (F9)



Diplomat 4N Color: RAL7016 Sash surface: RW Stained glass: 1.2-00-D/T/D Variant of application: RN Fittings: handle Baron (F9)



Diplomat 4P Color: RAL7016 Sash surface: RW Stained glass: 1.2-00-D/T/D Variant of application: RN Fittings: pull handle Q45 handle Baron / rosette (F9)



Diplomat 4R Color: RAL 9004 Sash surface: RW Stained glass: 3.2-34-T/F/R Variant of application: RN Fittings: handle Baron (F9)





Diplomat 4T Color: RAL7040 Sash surface: RW Stained glass: 3.1-125-T/D/T Variant of application: RN Fittings: handle Baron (F9)









Model: DIPLOMAT 58

Color: Italian walnut Sash surface: RW Stained glass: 3.1-126-T/D/T Door handling: Left to outside

Lock: 3-point strip lock lockable by handle Hinges: adjustable 3D in color of fittings

Variant of application: KZ Fittings: handle Lord (color: F9)



Diplomat 4V Color: RAL 8017 Sash surface: SMOOTH Stained glass: 3.1-127-D/T/D Variant of application: RZ+F Fittings: handle Lord (F9)




Diplomat 5F Color: Golden oak Sash surface: RW Stained glass: 1.2-00-D/T/D Variant of application: RN Fittings: handle Baron (F9)



Diplomat 81
Color: RAL 9011
Sash surface: RW
Stained glass: 6.1-82-T/D/T
Variant of application: RN + LC
Fittings: handle Baron (F9)

Dedicated stained glass





Catalog of composite doors 2015





DIPLOMAT 1H

Color: RAL 3003/7040

- optional

Sash surface: SMOOTH

Door handling: Right to outside

Lock: 3-point strip lock lockable by cylinder

- optional

Hinges: adjustable 3D in color of fittings

Stained glass: 3.1-12-T/D/T Variant of application: KW + F

Fittings: pull handle Q45 / handle Baron / rosette (color: F9)



Diplomat 11 Color: Walnut Sash surface: RW Stained glass: 4.1-29-T/F/R Variant of application: KW Fittings: handle Lord (F9)



Diplomat 1C Color: RAL7044 Sash surface: RW Stained glass: 2.1-10-D/F/D Variant of application: KW+FL - optional

Fittings: handle Baron (F9)



Diplomat 1i Color: RAL 7021/3003 - optional

- optional
Sash surface: RW
Stained glass: 2.1-09-D/T/D
Variant of application: KW+F
Fittings: handle Baron (F9)



Diplomat 1j Color: RAL 7036 Sash surface: SMO OTH Stained glass: 6.1-108-T/D/T Variant of application: KW+F Fittings: handle Baron (F9)



Diplomat 1K Color: RAL 9017 Sash surface: SMOOTH Stained glass: 6.1-11-T/D/T Variant of application: KW+F Fittings: handle Baron (F9)



Diplomat 1L Color: RAL 7040 Sash surface: SMOOTH Stained glass: 2.1-09-D/T/D Variant of application: KW+F Fittings: handle Baron (F9)



Diplomat 40
Color: RAL7026
Sash surface: RW
Stained glass: 6.1-11-T/D/T
Variant of application: RN+LC
(LC - optional)
Fittings: pull handle P45

handle Lord / rosette (F9)





Diplomat 4A Color: Walnut Sash surface: RW Stained glass: 6.1-11-T/D/T Variant of application: RN Fittings: handle Baron (F9)



Diplomat 4B Color: RAL7024 Sash surface: RW Stained glass: 6.1-11-T/D/T Variant of application: RN Fittings: handle Baron (F9)



Diplomat 4C Color: Walnut Sash surface: RW Stained glass: 4.1-29-T/F/R Variant of application: RN Fittings: handle Lord (F9)



Diplomat 4D Color: RAL5001 Sash surface: RW Stained glass: 3.1-124-T/D/T Variant of application: RN Fittings: handle Baron (F9)



Diplomat 4E Color: RAL 7040 Sash surface: RW Stained glass: 4.1-29-T/F/R Variant of application: RN Fittings: handle Lord (F9)



Diplomat 4F Color: RAL7024 Sash surface: RW Stained glass: 6.1-11-T/D/T Variant of application: RN Fittings: handle Baron (F9)



Diplomat 4G Color: RAL7043 Sash surface: RW Stained glass: 2.2-27-F/L/F Variant of application: RN Fittings: handle Baron (F9)



Diplomat 56
Color: RAL 8028
Sash surface: SMOOTH
Stained glass: 6.1-11-T/D/T
Variant of application: KW+F
Fittings: handle Baron (F9)



Diplomat 57 Kolor: RAL 7005 Powierzchnia: SMOOTH Witraž: 3.1-12-T/D/T Wariant aplikacji: KW+F Okucia: pochwyt P45 klamka Baron / rozetki (F9)



Diplomat 80 Kolor: Mahoń Powierzchnia: RW Witraż: 6.1-67-T/F/R Wariant aplikacji: RN Okucia: pochwyt P45 klamka Lord / rozetka (F9)

Dedicated stained glass



6.1-67-T/F/R

















Catalog of composite doors 2015





DIPLOMAT 26

Color: Golden oak
Sash surface: RW
Door handling: Left to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 2.3-20-T/D/T
Variant of application: RN
Fittings: handle Lord (color: F9)



Diplomat 1A
Color: 9016/9006
Sash surface: SMOOTH
Stained glass: 5.1-111-T/D/T
Variant of application: KW+PL
Fittings: pull handle P45
handle Baron / rosette (F9)



Diplomat 41 Color: RAL7021 Sash surface: RW Stained glass: 3.2-42-T/F/R Variant of application: RN Fittings: handle Baron (F9)



Diplomat 44
Color: Golden oak
Sash surface: RW
Stained glass: 2.2-95-T/D/T
Variant of application: RN
Fittings: handle Lord (F9)



Diplomat 50 Color: RAL 9004 Sash surface: RW Stained glass: 2.2-95-T/D/T Variant of application: RN Fittings: handle Baron (F9)



Diplomat 51 Color: RAL5014 Sash surface: RW Stained glass: 1.2-00-D/T/D Variant of application: RN Fittings: pull handle P45 handle Baron / rosette (F9)



Diplomat 52 Color: RAL 7000 Sash surface: RW Stained glass: 3.1-41-D/T/D Variant of application: RZ+F Fittings: handle Lord (F9)



Diplomat 53
Color: Golden oak
Sash surface: RW
Stained glass: 1.2-00-D/T/D
Variant of application: KW+F
Fittings: pull handle P45
handle Baron / rosettes (F9)









DIPLOMAT 5B


Color: RAL 7021
Sash surface: RW
Door handling: Left to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 1.2-00-D/T/D
Variant of application: RN
Fittings: handle Lord (F9)



Diplomat 54
Color: RAL 7036
Sash surface: RW
Stained glass: 3.1-117-T/D/T
Variant of application: KW+F
Fittings: handle Baron (F9)



Diplomat 55
Color: RAL 1000
Sash surface: SMOOTH
Stained glass: 5.1-110-T/D/T
Variant of application: KW+F
Fittings: handle Baron (F9)

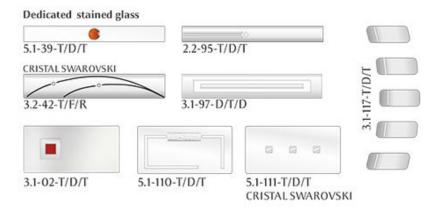







DIPLOMAT 6C

Color: RAL 7021 Sash surface: RW

Door handling: Right to outside

Lock: 4-point strip lock lockable by cylinder

- optional

Hinges: adjustable 3D in color of fittings

Stained glass: 3.1-129-D/T/D Variant of application: RN+F

Fittings: handle Lord / rosettes (color: F9)



Diplomat 60
Color: RAL 7024
Sash surface: RW
Stained glass: 1.2-00-D/T/D
Variant of application: RN
Fittings: pull handle P45
handle Lord / rosette (F9)



Diplomat 61 Color: RAL7015 Sash surface: RW Stained glass: 3.2-50-T/D/T Variant of application: RN Fittings: handle Baron (F9)



Diplomat 63
Color: RAL 3018
Sash surface: RW
Stained glass: 1.2-00-D/T/D
Variant of application: RN
Fittings: handle Baron (F9)




Diplomat 66
Color: RAL7004/7011
- optional
Sash surface: RW
Stained glass: 3.2-94-T/D/T
Variant of application: RN
Fittings: pull handle P45
handle Lord / rosette (F9)



Diplomat 6D Color: RAL 8001 Sash surface: RW Stained glass: 1.2-00-D/T/D Variant of application: RN Fittings: handle Baron (F9)

Dedicated stained glass









DIPLOMAT 6A

Color: RAL 7004
Sash surface: RW
Door handling: Left to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 1.2-00-D/T/D
Variant of application: RN
Fittings: handle Lord (color: F9)




Diplomat 75
Color: RAL 7043
Sash surface: RW
Stained glass: 3.1-64-D/T/D
Variant of application: RN
Fittings: pull handle P45
handle Lord / rosette (F9)



Diplomat 79
Color: RAL7035
Sash surface: SMOOTH
Stained glass: 1.2-00-D/T/D
Variant of application: RN
Fittings: pull handle P45
handle Lord / plate (F9)

Dedicated stained glass

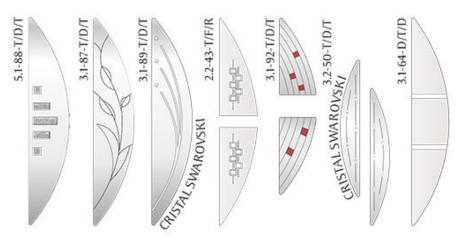



Diplomat 6F Color: RAL 8017 Sash surface: RW Stained glass: 3.1-92-T/D/T Variant of application: RN Fittings: handle Baron (F9)



Diplomat 6G Color: RAL 8028 Sash surface: RW Stained glass: 3.2-46-T/F/R Variant of application: RN Fittings: pull handle P45 handle Lord / rosette (F9)





Model: DIPLOMAT 7F
Color: Italian walnut
Sash surface: RW
Door handling: Left to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 3.1-78-T/D/T
Variant of application: RN
Fittings: handle Baron (color: F9)



Diplomat 77
Color: RAL 8017
Sash surface: RW
Stained glass: 3.1-56-D/T/D
Variant of application: RN
Fittings: pull handle P45
handle Lord / rosette (F9)



Diplomat 7A Color: RAL7016 Sash surface: RW Stained glass: 3.2-58-T/D/T Variant of application: RN Fittings: handle Baron (F9)



Diplomat 7D Color: RAL 6009 Sash surface: RW Stained glass: 3.2-58-T/D/T Variant of application: RN Fittings: pull handle P45 handle Lord / rosette (F9)



Diplomat 7E Color: Walnut Sash surface: RW Stained glass: 1.2-00-D/T/D Variant of application: RN Fittings: handle Baron (F9)



Diplomat 7G Color: RAL 7031/7035 - optional Sash surface: SMOOTH Stained glass: 3.1-115-T/D/T Variant of application: KW+F Fittings: pull handle P45

handle Lord / rosette (F9)



Diplomat 7H
Color: RAL 8007
Sash surface: SMOOTH
Stained glass: 3.2-83-T/D/T
Variant of application: KW+F
Fittings: pull handle P45
handle Lord / rosette (F9)







Model: DIPLOMAT 88
Color: Walnut
Sash surface: RW
Door handling: Left to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 3.2-57-T/D/T
Variant of application: RN
Fittings: handle Baron (F9)




Diplomat 89
Color: RAL 9004
Sash surface: RW
Stained glass: 3.1-56-D/II/D
Variant of application: RN
Fittings: pull handle P45
handle Lord / rosette (F9)



Diplomat 7i Color: RAL 8003 Sash surface: SMOOTH Stained glass: 3.2-57-T/D/T Variant of application: RZ+F Fittings: handle Baron (F9)

Dedicated stained glass

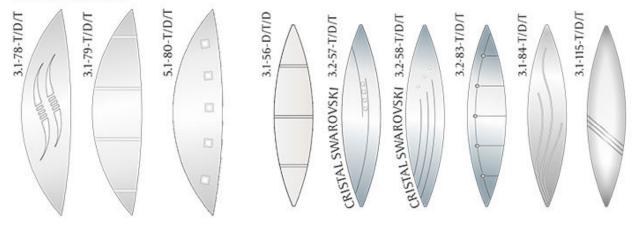







Model: DIPLOMAT 68 Color: RAL 9004 / Walnut

- optional

Sash surface: RW

Door handling: Right to outside


Lock: 3-point strip lock lockable by cylinder

- optional

Hinges: adjustable 3D in color of fittings


Stained glass: 3.2-53-T/F/R Variant of application: RN

Fittings: pull handle Q45 / handle Baron / rosette (color: F9)

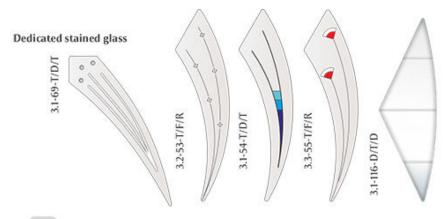



Diplomat 84
Color: Golden oak
Sash surface: RW
Stained glass: 1.2-00-D/T/D
Variant of application: RN
Fittings
handle Lord / rosettes (F9)



Color: RAL 9011/9006
- optional
Sash surface: SMOOTH
Stained glass: 1.2-00-D/T/D
Variant of application: KW+F
Fittings: handle Baron (F9)



Diplomat 8D
Color: RAL 7036/9011
- optional
Sash surface: SMOOTH
Stained glass: 3.1-116-D/T/D
Variant of application: KW+FL+F
Fittings: pull handle P45
handle Baron / rosette (F9)







Model: DIPLOMAT 82
Color: Walnut
Sash surface: RW
Door handling: Right to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 1.2-00-D/T/D
Variant of application: RN
Fittings: handle Baron (color: F9)



Diplomat 73 Kolor: Włoski orzech Powierzchnia: RW Witraż 5.1-60-T/D/T Wariant aplikacji: RN Okucia: klamka Lord / rozetki (F9)




Diplomat 85 Color: RAL 7026 Sash surface: RW Stained glass: 2.2-71-F/L/F Variant of application: RN Fittings: pull handle Q45 handle Baron / rosette (F9)



Diplomat 67 Color: RAL 7046 Sash surface: RW Stained glass: 3.2-52-T/D/T Variant of application: RN Fittings: handle Baron (F9)

Dedicated stained glass

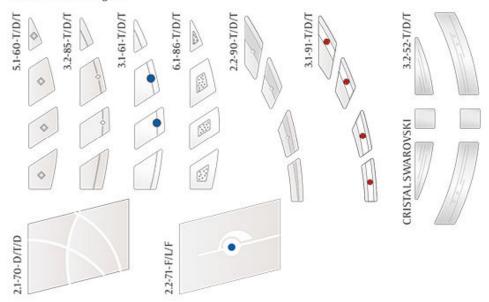


Presented in the catalog images show only a small part of our offer. In each model of composite doors, you can choose any color, equipment and stained glass designs, which the full range can be found on www.vikking.eu





Attache I

Attache 1 Color: Golden oak Sash surface: RW Fittings: handle Lord (F3)





Attache 2 Color: RAL 8017 Sash surface: RW Stained glass: 3.2-244-T/D/T Variant of application: RR Fittings: handle Lord (F9)



Attache 4 Color: Golden oak Sash surface: RW Stained glass: 1.2-00-D/T/D Variant of application: RR Fittings: handle Baron (F4)



Attache 4A Color: RAL 8016 Sash surface: RW Stained glass: 1.2-00-D/T/D Variant of application: RR Fittings: handle Baron (F4)



Attache 4B Color: Italian walnut Sash surface: RW Stained glass: 1.2-00-D/T/D Variant of application: RR Fittings: handle Baron (F4)



Attache 5 Color: Golden oak Sash surface: RW Stained glass: 3.2-215-D/T/D Variant of application: RR Fittings: handle Lord (F3)



Attache 10 Color: Walnut Sash surface: RW Stained glass: 3.2-244-T/D/T Variant of application: RR Fittings: pull handle P45 handle Lord / plate (F9)





Attache 11 Color: Mahogany Sash surface: RW Stained glass: 3.2-233-T/D/T Variant of application: RR Fittings: handle Baron (F9)



Attache 13 Color: Golden oak Sash surface: RW Stained glass: 3.2-215-T/D/T Variant of application: RR Fittings: handle Baron (F4)




Attache 16 Color: Golden oak Sash surface: RW Stained glass: 3.2-215-T/D/T Variant of application: RR Fittings: handle Baron (F4)



Attache 17
Color: RAL 7016
Sash surface: RW
Stained glass: 3.2-205-T/D/T
Variant of application: RR
Fittings:
handle Baron / rosettes (F9)

Dedicated stained glass



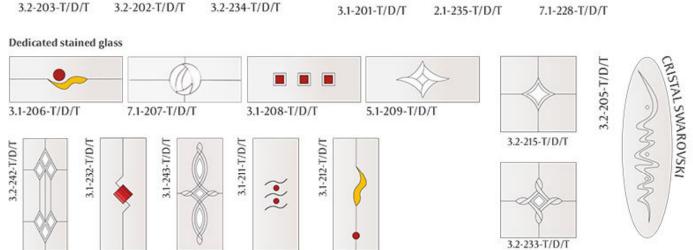





Model: CONSUL 3

Color: Dark oak Sash surface: RW

Door handling: Left to outside

Door frame: meranti

- optional

Lock: 3-point strip lock lockable by handle Hinges: adjustable 3D in color of fittings Stained glass: 3.2-242-T/D/T Variant of application: RR

Variant of application; RK Fittings: handle Baron (color: F4)



Consul 2 Color: Dark oak Sash surface: RW Stained glass: 3.2-229-T/D/T Variant of application: RR Fittings: handle Baron (F4)



Consul 4 Color: RAL 9016 Sash surface: RW Stained glass: 3.2-220-T/D/T Variant of application: RR Fittings: handle Lord (white)



Consul 5 Color: RAL7040 Sash surface: RW Stained glass: 3.2-219-T/D/T Variant of application: RR Fittings: handle Baron (F9)



Consul 6 Color: RAL 9016 Sash surface: RW Stained glass: 3.2-219-T/D/T Variant of application: RR Fittings: handle Baron (white)



Consul 7
Color: Walnut
Sash surface: RW
Stained glass: 3.2-236-T/D/T
Variant of application: RR
Fittings: handle Baron / rosettes (F4)



Consul 9
Color: Italian walnut
Sash surface: RW
Stained glass: 3.2-238-T/D/T
Variant of application: RR
Fittings: handle Lord (F4)









Eminence N1 Color: RAL 7013 Sash surface: RW Fittings: handle Baron (F9)

Model: EMINENCE N1

Color: RAL 5011 Sash surface: RW

Door handling: Left to outside


Lock: 3-point strip lock lockable by handle Hinges: adjustable 3D in color of fittings Fittings: handle Baron (color: F9)








NOTE! Doors from the Consul collection in all models of the indicated above area have a horizontal wood graining.



















3.2-218-T/D/T

2.1-223-T/L/T







Ambassador 1 Color: Italian walnut Sash surface: RW Fittings: handle Lord (F3)

Model: AMBASSADOR 2

Color: Walnut Sash surface: RW

Door handle: Left to outside

Lock: 3-point strip lock lockable by handle Hinges: adjustable 3D in color of fittings

Stained glass: 3.2-234-T/D/T Variant of application: RR Fittings: handle Lord (color: F4)

Note! The shape of presented creases is available only in **PREMIUM** line.

Note! The shape of presented creases is available only in ARCTIC line.




Ambassador IA* Color: Swamp oak Sash surface: RW Fittings: handle Baron (F4)



Ambassador 2A*
Color: Swamp oak
Sash surface: RW
Stained glass: 3.2-202-T/D/T
Variant of application: RR
Fittings:
handle Baron / rosettes (F4)

Dedicated stained glass

3.1-201-T/D/T



2.1-235-T/D/T


7.1-228-T/D/T








Model: PRESIDENT 2
Color: Golden oak
Sash surface: RW
Door handling: Right to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 3.1-239-F/D/F
Variant of application: RR
Fittings: handle Lord (color: F4)

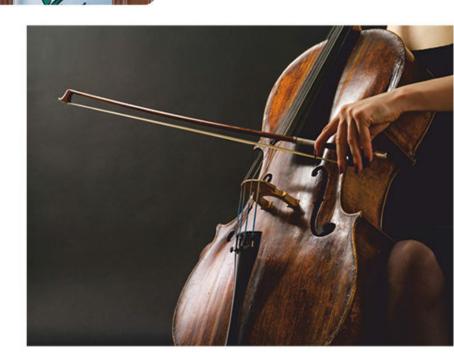

Dedicated stained glass

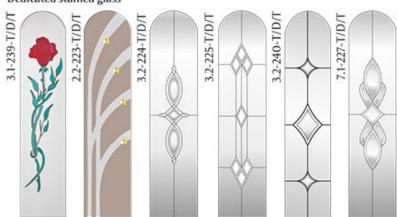




President 1*
Color: Dark oak
Sash surface: RW
Fittings: handle Lord (F3)





President 2*
Color: Swamp oak
Sash surface: RW
Stained glass: 3.2-224-F/D/F
Variant of application: RR
Fittings: handle Lord (F9)



Inspiration and trends

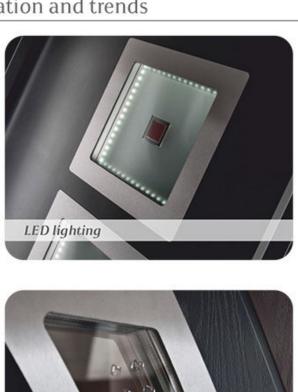















Inspiration and trends





DIPLOMAT 4U

Sidelights - variant II Color: RAL 7021 Left opening to outside Fingerprint Reader

- optional

3-point strip lock lockable automatically Stained glass: 3.1-128-D/T/D Variant of application: RN Pull handle P45 L = 1600 mm



DIPLOMAT 4T

Sidelights - variant II Color: RAL 7021 Right opening to outside 3-point strip lock lockable by cylinder Stained glass: an individual project

- optional

Variant of application: RN Pull handle P45 L = 800 mm



DIPLOMAT 4M

Sidelight - variant I Color: RAL 7016 Left opening to outside Mechanical locking plate

- optional

3-point strip lock lockable by cylinder Stained glass: 3.1-127-D/T/D

Variant of application: RN - asymmetric position

- optional


Pull handle P45 L = 1600 mm

Permanently and aesthetically mark the number of your home

(send request: wyceny@vikking.eu)





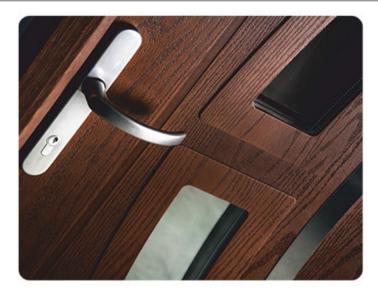

DIPLOMAT 20 - projekt niestandardowy

Sidelight - variant Ia - battens 3 pcs.

- optional

Color: Italian walnut Left opening to outside 3-point strip lock lockable by handle Stained glass: 1.4-00-T/F/R Variant of application: KZ+RN+F

optional

Handle Lord (color: F9)







DIPLOMAT 4M

Sidelight - variant II Color: RAL 8007 Left opening to outside Bluetooth

- optional

3-point strip lock lockable automatically Stained glass: 3.1-128-D/T/D Variant of application: RZ Pull handle P45 L = 1600 mm

DIPLOMAT 26

Sidelight - variant I - filling: composite panel with glazings - optional

Color: Winchester
Left opening to outside
3-point strip lock lockable by handle
Stained glass: individual project
Variant of application: RN
Handle Lord (color F9)



DIPLOMAT 6C/4i

Double door

- optional

Color: RAL 7016/7040 Left opening to outside 3-point strip lock lockable by handle Stained glass: 3.2-46-T/F/R Variant of application: RN Handle Baron (color: F9)



DIPLOMAT 6A

Sidelights - variant II
Color: RAL 9016
Right opening to outside
3-point strip lock lockable by handle
Stained glass: 1.2-00-D/T/D
Variant of application: RN
Handle Lord (color F9)



DIPLOMAT 68

Sidelight - variant I Color: RAL7040/9007 Left opening to outside Fingerprint Reader

- optional

3-point strip lock lockable automatically Stained glass: 3.2-53-T/F/R Variant of application: RZ Pull handle Q45 L = 1200 mm





DIPLOMAT 58

Sidelights - variant II
Color: RAL 7016
Right opening to outside
3-point strip lock lockable by handle
Stained glass: 3.1-126-T/D/T
Variant of application: RN
Handle Lord (color F9)



DIPLOMAT 22

Sidelight - variant I
Color: RAL 7016
Right opening to outside
3-point strip lock lockable by cylinder
Stained glass: 1.2-00-D/T/D
Variant of application: RN
Pull handle P45B



DIPLOMAT 44

Sidelight - wariant I
Color: RAL 9016
Right opening to outside
3-point strip lock lockable by cylinder
Stained glass: 2.2-95-T/D/T
Variant of application: RN
Pull handle P45 L = 1600 mm

Inspiration and trends





DIPLOMAT 62

Color: Dark oak / Walnut

- optional

Left opening to outside

3-point strip lock lockable by handle

Stained glass: 2.2-43-T/D/T

Variant of application: RN - INOX finish frame painted in

color F4

- optiona

Handle Lord (color F4)





PRESIDENT 2

Sidelights - variant Va
Color: Golden oak
Left opening to outside
3-point strip lock lockable by handle
Stained glass: an individual project - optional
Variant of application: RR
Handle Lord (color F4)





CONSUL3

Top light - wariant III Color: Dark oak Left opening to inside 3-point strip lock

lockable by handle Stained glass: 3.2-229-T/D/T and 3.2-242-T/D/T Variant of application: RR Handle Lord (color F4)



AMBASSADOR 2A

Sidelights - individual project

- optional

Color: Swamp oak

Left opening to outside

4-point strip lock lockable by cylinder

- optional

Stained glass: 3.2-202-T/D/T

Variant of application: RR

Handle Baron / rosettes (color F4)



PRESIDENT 2

Top light - variant III
Color: Golden oak
Right opening to outside
3-point strip lock
lockable by handle
Stained glass: 7.1-227-T/D/T
Variant of application: RR
Handle Lord (color F4)



PRESIDENT 1

Sidelights - variant II
Color: Italian walnut
Right opening to outside
3-point strip lock
lockable by handle
Stained glass: 1.2-00-D/T/D
Handle Lord (color F4)



AMBASSADOR 2

Sidelights - variant II - filling: composite panel with glazings

- optional

Color: RAL 9016

Right opening to outside

4-point strip lock lockable by cylinder

- optional

Stained glass: 7.1-228-T/D/T

and 3.2-219-T/D/T

Variant of application: RR Handle Lord / rosettes (color F4)



OPTIMAL line



Composite doors of OPTIMAL line have an excellent quality products with well-balanced design and high performance. Their additional advantage is the long-term durability combined with a minimum of maintenance. The optimal offer for those, who is looking for excellent quality doors at affordable prices.

Protection factor against heat loss - U o from 0,85 W/m2K

Purpose of door:

- Entrance external doors dedicated to housing, opening to the outside or inside
- Entrance internal doors.

Standard equipment:

- composite sash 45 mm in the rebate version of wood-like surface Real Wood structure
- PVC door frame 70 mm made of six-chamber profile class A of wood-like surface Real Wood structure.
- door set finally painted with the highest quality lacquers in the full range of RAL colors optional: in one of the wood decors - see price list,
- low aluminium threshold with thermal barrier, optional: with the system of insulating profiles see price list,
- three 3D adjustable hinges with increased resistance to burglary,
- three-point anti-theft strip lock, lockable by handle, optional: anti-theft blockade system - see price list,
- 3 locking plates made of stainless steel,
- ✓ double sealing system around the edges
- in versions with glazing: triple glazed units decorated with use of resin technology.

Optional: custom projects - see price list. Dedicated fittings: see price list.

Note! Doors of OPTIMAL line are resistant to moisture, but they still should be protected by use of roofing, that provides full protection against sunlight, which may, in extreme circumstances result in short-term deformation of the sash.





























INTERIOR line



Composite entrance doors of INTERIOR line have a timeless solutions that combines durability, safety and aesthetics of the non-rebated sashes.

Protection factor against heat loss - Up from 1,0 W/m2K

Purpose of door:

- ✓ Entrance internal doors,
- Entrance external doors opening to the outside or inside.
- technical doors and indoor doors composite sashes have above-average resistance to heavy utilization and vandalism, while maintaining excellent protection against cold, noise and burglaru.
- perfect especially for facilities with high usage and requirements of above-average moisture resistance.

Standard equipment:

- composite sash 45 mm in the non-rebated version of wood-like surface Real Wood structure,
- PVC door frame 70 mm made of five-chamber profile of wood-like surface Real Wood structure,
- door set finally painted with the highest quality lacquers in the full range of RAL colors optional: in one of the wood decors - see price list,
- ✓ low aluminium threshold with thermal barrier,
- three 3D adjustable hinges,
- mortise lock 72mm x 45mm, optional: additional upper lock or three-point anti-theft strip lock lockable by handle, see price list,
- ✓ adjustable locking plates,
- triple sealing system of door frame and double sealing of threshold,
- in versions with glazing: triple glazed units decorated with use of resin technology.

Optional: custom projects - see price list. Dedicated fittings: see price list.

Note! Doors of INTERIOR line are resistant to moisture, but they still should be protected by use of roofing, that provides full protection against sunlight, which may, in extreme circumstances result in short-term deformation of the sash













Catalog of composite doors 2015







Diplomat S Color: RAL 7047 Sash surface: SMOOTH Fittings: handle Lord (F9)



- optional

Door handling: Left to outside Lock: 3-point strip lock lockable by handle Hinges: adjustable 3D in color of fittings Variant of application: F Fittings: handle Lord (color: F9)



Diplomat 9 Color: RAL 7038 Sash surface: RW Variant of application: F Fittings: pull handle P45 handle Lord / rosette (F9)



Diplomat OB Color: RAL7035 Sash surface: RW Variant of application: F Fittings: handle Prince (F9)



Diplomat OE Color: RAL7023 Sash surface: RW Variant of application: F Fittings: handle Prince (F9)



Diplomat 0 F Color: RAL7003 Sash surface: RW Variant of application: F Fittings: pull handle P45 handle Lord/rosette (F9)



Diplomat OH Color: RAL 8001 Sash surface: RW Variant of application: F Fittings: handle Prince (F9)



Diplomat Oi Color: RAL 8001 Sash surface: RW Variant of application: F Fittings: handle Prince (F9)





Diplomat OJ Color: RAL7021 Sash surface: RW Variant of application: F Fittings: handle Prince (F9)



Diplomat OL Color: RAL5014 Sash surface: RW Variant of application: F Fittings: handle Prince (F9)



Diplomat OM Color: RAL7039 Sash surface: RW Variant of application: F Fittings: handle Prince (F9)



Color: Winchester
- optional
Sash surface: RW
Variant of application: F
Fittings: handle Prince (F9)



Diplomat OP Color: RAL7046 Sash surface: RW Variant of application: F Fittings: handle Prince (F9)





Model: DIPLOMAT 2A
Color: Italian walnut
- optional
Sash surface: RW
Door handling: Right to inside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in colour of fittings
Stained glass: 1.2-00-D/F/D
Variant of application: RN
Fittings: handle Lord (color: F9)



Color: RAL 9016
Sash surface: RW
Stained glass: 1.2-00-D/F/D
Variant of application: RN+LC
(LC - optional)
Fittings: pull handle P45B
handle Lord / rosette (F9)

Dedicated stained glass



Presented in the catalog images show only a small part of our offer.

In each model of composite doors, you can choose any color, equipment and stained glass designs, which the full range can be found on www.vikking.eu

Presented door models in the optimal group are available as standard in OPTIMAL and INTERIOR lines





Model: DIPLOMAT 4D Color: Mahogany - optional Sash surface: RW Door handling: Left to outside Lock: 3-point strip lock lockable by handle Hinges: adjustable 3D in color of fittings Stained glass: 3.1-411-F/D/F Variant of application: RN Fittings: handle Baron (color: F9)



Diplomat 40 Color: RAL 5022 Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RN Fittings: handle Prince (F9)



Diplomat 4A Color: Golden oak - optional Sash surface: RW Stained glass: 3.1-411-F/D/F Variant of application: RN Fittings: handle Lord (F4)



Diplomat 4B Color: RAL7000 Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RN Fittings: handle Prince



Diplomat 85 Color: RAL 6015 Sash surface: RW Stained glass: 3.1-422-F/D/F Variant of application: RN Fittings: handle Prince (F9)

Dedicated stained glass



3.1-411-F/D/F



3.1-410-F/D/F



3.1-422-F/D/F










Model: DIPLOMAT 41 Color: RAL7016

Sash surface: RW Door handling: Left to outside Lock: single point mortise lock

Hinges: adjustable 3D in color of fittings

Stained glass: 1.2-00-D/F/D Variant of application: RN





Diplomat 44
Color: Golden oak
- optional
Sash surface: RW
Stained glass: 1.2-00-D/F/D
Variant of application: RN

Fittings: handle Lord (F4)

Dedicated stained glass

3.1-415-F/D/F 3.1-416-F/D/F



Diplomat 50 Color: RAL 9004 Sash surface: RW Stained glass: 3.1-415-D/F/D Variant of application: RN Fittings: handle Prince (F9)



Diplomat 51 Color: RAL 7000 Sash surface: RW Stained glass: 3.1-415-F/D/F Variant of application RN Fittings: klamka Prince (F9)



Diplomat 5A Color: RAL 7040 Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RN Fittings: handle Prince (F9)

Presented in the catalog images show only a small part of our offer.

In each model of composite doors, you can choose any color, equipment and stained glass designs, which the full range can be found on www.vikking.eu

Presented door models in the optimal group are available as standard in OPTIMAL and INTERIOR lines





Model: DIPLOMAT 42
Color: RAL 9016
Sash surface: RW
Door handling: Left to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 1.2-00-D/F/D
Variant of application: RN
Fittings: handle Lord (color: white)



Diplomat 43 Color: RAL 7016 Sash surface: RW Stained glass: 3.1-406-D/F/D Variant of application: RN Fittings: handle Prince (F9)



Diplomat 45 Color: RAL 8017 Sash surface: RW Stained glass: 3.1-407-F/D/F Variant of application: RN Fittings: handle Prince (F9)



Diplomat 46
Color: Walnut
- optional
Sash surface: RW
Stained glass: 1.2-00-D/F/D
Variant of application: RN
Fittings: handle Prince (F9)




Diplomat 48
Color: RAL7035
Sash surface: SMOOTH
optional
Stained glass: 1.2-00-D/F/D
Variant of application RN
Fittings: handle Prince (F9)



Diplomat 4H
Color: Italian walnut
-optional
Sash surface: RW
Stained glass: 1.2-00-D/F/D
Wariant of application: RN
Fittings: handle Prince (F9)

Dedicated stained glass







Diplomat 4i Color: RAL7021 Sash surface: RW Stained glass: 3.1-401-F/D/F Variant of application: RN Fittings: handle Prince (F9)



Diplomat 4J Color: RAL 7021 Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RN Fittings: handle Prince (F9)



Diplomat 4K Color: RAL 5004 Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RN Fittings: handle Prince (F9)




Diplomat 4Z model avalible only in INTERIOR line Color: RAL7040 Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: KW Fittings: pull handle P45 handle Lord/rosette (F9)





Dedicated stained glass



DIPLOMAT 4P

Color: RAL 7016
Sash surface: RW
Door handling: Right to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 1.2-00-D/F/D
Variant of application: RN
Fittings: handle Lord (color: F9)



Color: Italian walnut - optional Sash surface: RW Door handling: Left to outside Lock: 3-point strip lock lockable by handle Hinges: adjustable 3D in color of fittings Stained glass: 1.2-00-D/F/D Variant of application: RN Fittings: handle Prince (color: F9)





Diplomat 6C Color: RAL 7021 Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RN Fittings: handle Prince (F9)



Diplomat 6F Color: RAL 8017 Sash surface: RW Stained glass: 3.1-428-F/D/F Variant of application: RN Fittings: handle Prince (F9)




Diplomat 61 Color: RAL 7026 Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RN Fittings: handle Baron (F9)



Diplomat 7A Color: RAL7026 Sash surface: RW Stained glass: 3.1-430-F/D/F Variant of application: RN Fittings: handle Prince (F9)



Diplomat 84 Color: Golden oak - optional Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RN Fittings: handle Lord (F9)









FABULOUS INSPIRATIONS

















Model: ATTACH E 10
Color: Walnut - optional
Sash surface: RW
Door handling: Left to inside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 1.2-00-D/F/D
Variant of application: RR
Fittings: handle Baron (color: F4)
Drip cap color F9 - optional



Attache 1 Color: Golden oak - optional Sash surface: RW Fittings: handle Prince (F9)



Attache 2 Color: RAL 8017 Sash surface: RW Stained glass: 3.1-503-F/D/F Variant of application: RR Fittings: handle Prince (F9)



Attache 4 Color: RAL 5009 Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RR Fittings: handle Prince (F9)



Attache 4A Color: RAL5014 Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RR Fittings: handle Prince (F9)



Attache 4B
Color: Walnut
- optional
Sash surface: RW
Stained glass: 1.2-00-D/F/D
Variant of application: RR
Fittings: handle Baron (F4)



Attache 5
Color: Golden oak
- optional
Sash surface: RW
Stained glass: 3.1-509-F/D/F
Variant of application: RR
Fittings: handle Lord (F3)



Attache 11
Color: Mahogany
- optional
Sash surface: RW
Stained glass: 3.1-510-F/D/F
Variant of application: RR
Fittings: handle Prince (F9)







Model: ATTACH E 14

Color: Mahgany

- optional

Sash surface: RW

Door handling: Right to outside Lock: 3-point lockable with handle

Hinges: adjustable 3D in color of fittings

Stained glass: 1.2-00-D/F/D Variant of application: RR Fittings: handle Lord (kolor: F9)



Attache 13
Color: Golden oak
- optional
Sash surface: RW
Stained glass: 3.1-511-F/D/F
Variant of application: RR

Fittings: handle Baron (F4)



Attache 16
Color: Walnut
- optional
Sash surface: RW
Stained glass: 3.1-511-F/D/F
Variant of application: RR
Fittings: handle Baron (F4)

Dedicated stained glass




















Presented in the catalog images show only a small part of our offer.

In each model of composite doors, you can choose any color, equipment and stained glass designs, which the full range can be found on www.vikking.eu

Presented door models in the optimal group are available as standard in OPTIMAL and INTERIOR lines






Model: CONSUL 2
Color: Walnut
- optional
Sash surface: RW
Door handling: Right to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 3.1-517-F/D/F
Variant of application: RR
Fittings: handle Lord (color: F4)




Consul 3
Color: Walnut
- optional
Sash surface: RW
Stained glass: 3.1-501-F/D/F
Variant of application: RR
Fittings: handle Lord (F4)



Consul 4
Color: Walnut
- optional
Sash surface: RW
Stained glass: 3.1-514-F/D/F
Variant of application: RR
Fittings: handle Lord (F4)









3.1-518-F/D/F

Consul 5
Color: Golden oak
- optional
Sash surface: RW
Stained glass: 3.1-514-F/D/F
Variant of application: RR
Fittings: handle Lord (F4)



3.1-517-F/D/F


Consul 6 Color: RAL 9016 Sash surface: RW Stained glass: 3.1-514-F/D/F Variant of application: RR Fittings: handle Lord (white)



Consul 7
Color: Walnut
- optional
Sash surface RW
Stained glass: 3.1-528-F/D/F
Variant of application: RR
Fittings: handle Lord (F4)



Consul 9
Color: Mahogany
- optional
Sash surface: RW
Stained glass: 3.1-529-F/D/F
Variant of application: RR
Fittings: handle Lord (F4)













Model: PRESIDENT 2
Color: RAL 9016
Sash surface: RW
Door handling: Left to outside
Lock: 3-point strip lock lockable by handle
Hinges: adjustable 3D in color of fittings
Stained glass: 1.2-00-D/F/D
Variant of application: RR
Fittings: handle Prince (color: F9)



President 1 Color: Orzech - optional Sash surface: RW Fittings: handle Lord (F3)









Model: AMBASSADOR 2

Color: RAL7043
Sash surface: RW
Door handling: Right to outside
Lock: 1-point mortise lock
Hinges: adjustable 3D in color of fittings
Stained glass: 3.1-524-F/D/F

Variant of application: RR

Fittings: handle Special (color: brass-patina)



3.1-524-F/D/F



3.1-525-F/D/F



3.1-526-F/D/F




Attache 17 Color: RAL7016 Sash surface: RW Stained glass: 1.2-00-D/F/D Variant of application: RR Fittings: handle Prince (F9)



Ambassador 1 Color: Orzech - optional Sash surface: RW Fittings: Kora (nickel-chrome)

The most popular colors of composite doors

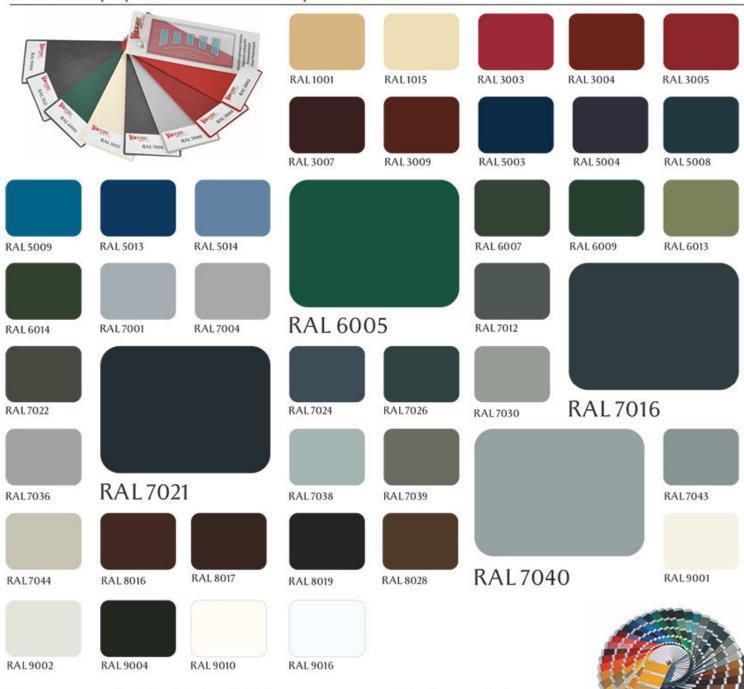

Above we present the RAL colors, in which the most common are painted composite doors. Our customers have access to a full range of RAL and they decide about the color of their doors of dream.

For lovers of precious wood colors, we offer to choose from one of the many decors created by hand by craftsmen with the highest qualifications.



Composite doors VIKKING can be painted in two colors (divided into the outer side and an inner side), as well as several colors on each side.










Bevels - the beauty of grinded glass



Fusing - the colors fired in the glass
























Laser decorations - style and precision













Resin - festival of colors











LED lighting - bright accent of your home











Small bubbles, lines, pollen, inclusions and surface imperfections are natural properties of stained glass decorations. They are not considered to be defects. Assessment of defects must be made at the daily diffused light, with the unaided eye from a distance of at least 1 m looking at right angles.

LINE	Collection / Model	The external dimension of the door frame		The recommended size of the wall opening		The internal dimension of the door frame		Maximum shortening/	Sash size	
		PVC	Meranti	PVC	Meranti	PVC	Meranti	narrowing of		
		S1 n H1	S1 x H1	S2 n H2	S2 x H2	SO x HO	S0 x H0	the door	S	h
ARCTIC	Diplomat, Attache	1045 x 2100	1030 x 2090	1070 x 2120	1060 x 2100	885 x 2000	880 x 1995		950	2040
		1075 x 2100	1060 x 2090	1100 к 2120	1090 x 2100	915 x 2000	910 x 1995	Unbound ***	970	2040
A		1095 x 2210	1080 x 2200	1120 x 2230	1110 x 2210	935 x 2110	930 x 2105		1000	2150
	Diplomat, Attache	920 x 2065	935 ห 2070	950 ห 2080	960 x 2080	790 x 1975	785 x 1980		838	2013
2		1000 x 2065	1010ส 2070	1030 к 2080	1040 x 2080	865 x 1975	860 x 1980		914	2013
ARCTIC		1035 x 2090	1045 x 2095	1060 к 2100	1070 ន 2110	900 x 2005	895 ห 2005	Unbound ***	950	2040
A		1085 x 2200	1095 x 2205	1110 x 2210	1120 x 2220	950 x 2115	945 x 2115		1000	2150
	P*; A*; C*; E*	1000 x 2065	1010 x 2070	1030 x 2080	1040 x 2080	865 x 1975	860 x 1980	120 / 40	914	2013
	Diplomat, Attache	920 x 2065	935 ห 2070	950 x 2080	960 x 2080	790 x 1975	785 x 1980		838	2013
		1000 x 2065	1010 x 2070	1030 x 2080	1040 x 2080	865 x 1975	860 x 1980		914	2013
M		1035 x 2090	1045 x 2095	1060 x 2100	1070 x 2110	900 x 2005	895 ห 2005	Unbound ***	950	2040
PREMIUM		1085 x 2200	1095 x 2205	1110 x 2210	1120 x 2220	950 x 2115	945 ห 2115		1000	2150
'RE	President "80"	920 x 2065	935 ห 2070	950 x 2080	960 x 2080	790 x 1975	785 x 1980	120 / 0	838	2013
_	P*; A*; C*; E*	1000 x 2065	1010 x 2070	1030 x 2080	1040 x 2080	865 x 1975	860 x 1980	120 / 0	914	2013
	Ambassador "95"	1020 x 2080	1030 x 2085	1050 x 2090	1060 x 2100	885 x 1995	880 x 1995	120 / 0	935	2030
	Diplomat, Attache	920 x 2065	-	950 x 2080		790 x 1975	-	120 / 0	838	2013
AL		1000 x 2065	-	1030 x 2080		865 x 1975	-	120 / 0	914	2013
OPTIMAL	President "80"	920 x 2065		950 x 2080		790 x 1975		120 / 0	838	2013
OP	P*;A*; C*; E*	1000 x 2065		1030 к 2080		865 x 1975	-	120 / 0	914	2013
	Ambassador "95"	1020 к 2080	-	1050 к 2090	-	885 x 1995	2	120 / 0	935	2030
INTERIOR	Diplomat, Attache	950 x 2085		980 x 2100		810 x 1990			838	2013
		1025 x 2085	(+)	1050 x 2100		885 x 1990	1.5	Unbound ***	914	2013
		1060 x 2115	(4)	1090 x 2130		920 x 2015	-		950	2040
TE	President "80"	950 x 2085		980 x 2100		810 x 1990		120 / 0	838	2013
4	P*; A*; C*; E*	1025 x 2085	150	1050 x 2100		885 x 1990		120 / 0	914	2013
	Ambassador "95"	1045 x 2105		1070 x 2120		905 x 2005		120 / 0	935	2030

Caption: P* - President; A* - Ambassador; C* - Consul; E* - Eminence.

- ✓ Dimension tolerance in accordance with PN: up to 1 m: +/- 1 mm; over 1 m +/- 2 mm.
- All door models of the ARCTIC Plus, ARCTIC, PREMIUM line in Diplomat and Attache collections, on request can be narrowed or shortened in any size - see price list.


Optional: all door models may have a door frame extensions - see price list.

Double doors, sidelights, top lights and custom projects (with the exception of technical limitations) are carried out according to individual orders - please contact us: wyceny@vikking.eu or bok@vikking.eu


For you we are flexible

^{**}Maximum modification parameters of door with glazings are limited by the shapes and dimensions of stained glass.


The scheme of door in the rebate version

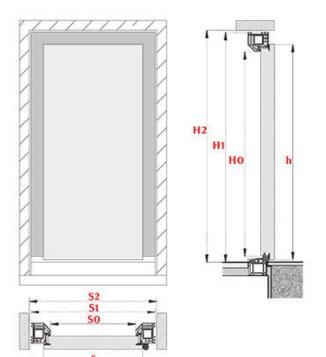


The scheme of door in non-rebated version

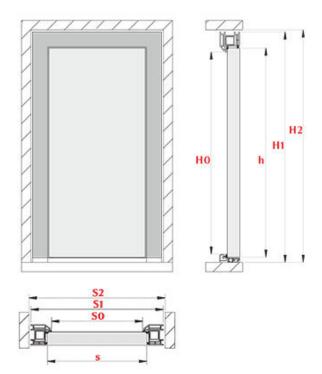

Variants of opening the door - seen from the outside

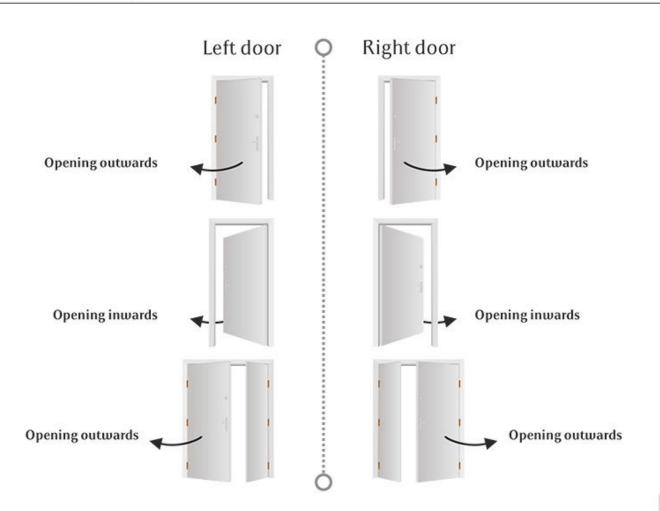

Variants of sidelights - perfectly tailored to your needs

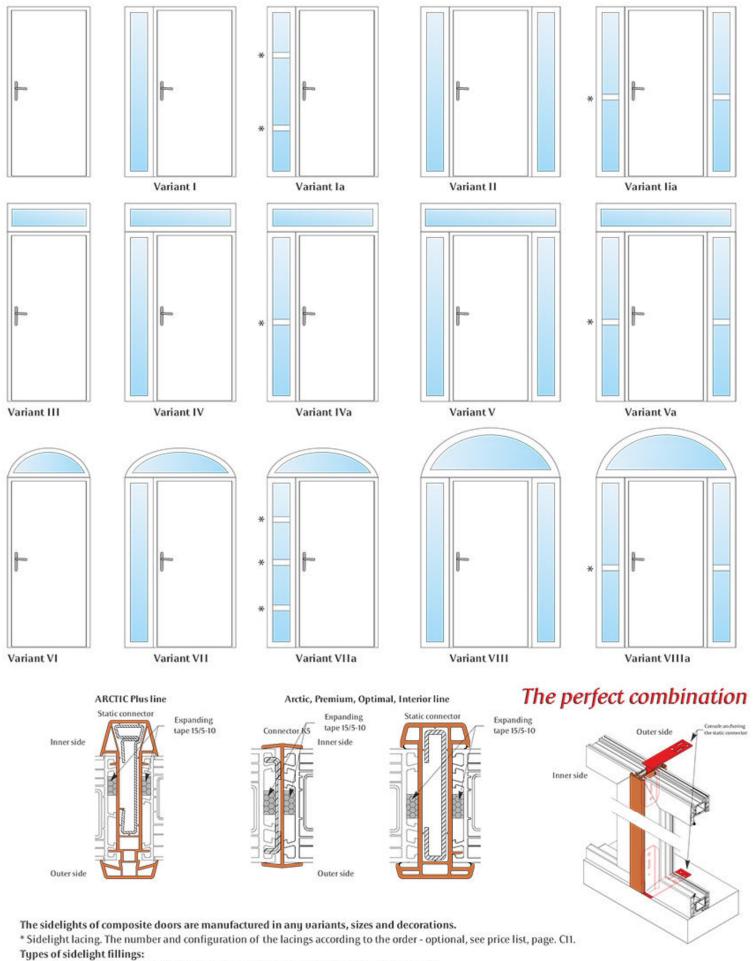

- ✓ triple glazed decorated glass unit in the design identical as stained glass of the sash,
- filling with composite panel of the structure and colors identical with the door sash.

Optional: composite panels filled with glazing unit in the design identical as stained glass of the sash - individual pricing.

Application variants of decorations and glass units



SMOOTH SMOOTH surface

RW Real Wood surface (precious wood structure)

F milled decoration of sash surface - one-sided

FL flush stainless steel strip

flush stainless steel strip - variant not available

PL stainless steel finish strip

LC stainless steel plinth strip (finish, height 90 mm)

RZ | flush stainless steel frame

flush stainless steel frame - variant not available

RN stainless steel finish frame

KZ external composite frame

KW internal composite frame

ZW the system on both sides frameless

RR decorative frame of the classic collection

Safety above all



- All core and corps pins are steel hardened
 Security mushroom pins as a protection
 against picking
- 3. Hardened steel pins in the corps to protect against picking against drilling 3. Hardened ste
- Hardened steel pins in the core to protect against drilling
- 5. PROTECTOR special active SV pin in the cylinder's cover: protection of key profile against unauthorized copying, protection of cylinder via an additional blocking element 6. Lateral valvular balls as additional blocking elements
- 7. Special protected key profile



- 1. Steel and brass core and corps pins are hardened with nickel coating
- Security mushroom pins as a protection
 against picking
- 3. Hardened steel pins in the corps to protect against drilling
- 4. Hardened steel pins in the core to protect against drilling
- 5. Special protected key profile



- Steel and brass core and corps pins are hardened with nickel coating
- 2. Security mushroom pins as a protection against picking
- Hardened steel pins in the corps to protect against drilling
- 4. Hardened steel pins in the core to protect against drilling



- Steel and brass core and corps pins are hardened with nickel coating
- 2. Security mushroom pins as a protection against picking



	Cylinder type	Category of use	Test cycles / durability	Door weight	Fire resistance	Security	Corrosion resistance	The security code	Resistance to attack	Burglar resistance
Classification	C PREM.	1	6	0	1	0	В	6	2	c
according to EN 1303:2007	c	1	6	0	1	0	В	6	2	С
34 (303.200)	В	1	6	0	1	0	В	6	2	В
	Ä	i	6	0	1	0	В	6	0	A

BioKey - Your biometric key

Your fingerprint reader Your biometric key

The fingerprint reader provides security for you and your loved ones without the risk of loss or theft of the keys. Your (thumb / finger) is impossible to falsify.

Perfect solution for the household who often come in the house and go outside. Put the registered finger to the reader and slide along the surface of the reader,

and your door will open automatically.

When you cross the threshold - the door closer will immediately close the sash and the automatic lock will block it again. When you want you can open the door from the outside with use of the key and from the inside with use of the handle.

Ingeniously simple coding and change of the users do not need to use software or tools.

The fingerprint reader can be connected to the intelligent home system.

Forget about the keychain and slammed door. A fingerprint reader is comfort as well as the security of your loved ones. Allows for registration up to 150 users.



Keyboard made of stainless steel

The keyboard is usually mounted in the sash. On the outside is visible the waterproof keypad made of stainless steel.

The controls are very simple, motor door lock is unlocked by entering any of the programmed code (4 to 8 digits). When you cross the threshold - the door closer will immediately close the sash and the automatic lock will block it again. When you want you can open the door from the outside with use of the key and from the inside with use of the handle.

The system can be programmed in a very friendly way with a considerable amount of codes, that can be allocated to any person and at any time can be change directly on the keyboard.

Excellent solution for public and multi-family buildings as the first barrier to access.

Biokey keyboard can be connected to the intelligent home system.



Bluetooth

Control of lock in composite doors has never been so comfortable and easy.

Just use your phone with bluetooth application to get rid of the annoying keychain.

Bring your phone close up to the reader and touch your finger to the bluetooth panel - the automatic lock will immediately unlock the locking bolts.

When you cross the threshold - the door closer will immediately close the sash and the automatic lock will block it again.

When you want you can open the door from the outside with use of the key and from the inside with use of the handle.

Comfort within your multimedia phone.

Simple, intuitive application - and your doors are becoming more intelligent.

Biokey system allows you to program up to 6 devices and can be connected to the intelligent home system.





For your convenience and security in all doors in rebate version we use the highest-quality multi-point, anti-theft strip locks



Only in composite doors hinges are flush with the sash, are adjustable in three dimensions (3D), don't require maintenance. always in the color identical to fittings with no hidden surcharges for the covers.

Highest Swiss quality!

Set of components dedicated to composite doors with one-sided pull handle and electric door strike or mechanical locking plate with day / night function.

Door handles - branded, durable, safe



















































+ stand 15 mm

+ stand 30 mm



Microswitch



inner side

outer side

AXA DDS1 eye viewer

We will take care of the nature and future generations

Directive of the European Parliament dated 19.05.2010 on the energy performance of buildings requires that after 31/12/2020 all new buildings should be nearly zero-energy buildings.

Passive buildings are the energy efficient buildings with the highest thermal comfort and extremely low energy demand for heating - less than 15 kWh/m 2/year.

Passive building is designed to use and keep inside the warmth deriving from the sun and renewables. Do not wait until the last minute, save today!

Arctic Plus composite doors with a vengeance meet the strict requirements of the passive house.

The idea of passive construction is very close to us.

We actively support all activities to promote the improvement of energy efficiency, reduction of emissions of CO2 and other harmful gases into the atmosphere.

Our share in the development of energy-efficient, airtight and durable composite doors has been confirmed by Polish Passive House Institute and Renewable Energy by granting us the title of Ambassador of Passive Construction.

What you should know about installation of the front door?

The door mounted before the completion of all works is exposed to damage or destruction. In this case, until the works are completed we recommend the use of temporary technical doors.

The door should be installed after the completion of all wet construction works, completion of target floor and bringing the humidity inside the building to a stable level below 60%.

Prior to installation, the wall within the door opening shall be prepared to the dimensions recommended by the manufacturer and the floor within the threshold section should have a channel required for the positioning of insulating PVC profiles.

In principle (if the investor has not made other arrangements with the seller) these works are not included in standard door assembly service.

Connection of door with the wall should be made in such a way, that it provides the total air tightness through a layer of frame insulation. Triple-layer warm assembly with the use of internal and external films increases the tightness with the wall by more than 70% compared to a conventional installation using polyurethane foam.

Composite entrance doors should be installed close to the outer layer of insulation in order to optimal use of their excellent protection against heat loss. The optimal solution is the location of the door frame in the way that it is partially covered by outer insulation wall. The optimal solution is the location of the door frame in the way that it is partially covered by outer insulation wall.

Application of the method called triple-layer warm assembly eliminates thermal bridges and will contribute to the reduction of energy losses.

Traditional methods using mounting foam will not provide permanent protection against moisture and heat loss. Negligence in this regard can lead to costly, irreversible damage and to the growth of mold and mildew.

To provide a stable positioning and protection against heat loss, the door should be firmly fixed on a PVC insulation profile with use of professional mounting components recommended by the manufacturer.

Equally important is the proper execution of thermo-insulation and waterproofing within threshold section.

For the isolation of subliminal part it is prohibited to use mounting foams, for this purpose should be done only **insulating expansion** tape 15 / 5-12 or a flexible EPDM film.

NOTE: Prohibited is to assembly the door with use of anchors used for PVC windows because of their limpness, not providing the stability of door frame profiles.

All recommended components for correct installation, composite doors insulation and preservatives are available in the manufacturer's offer and its authorized distributors - see www.vikking.eu/dealerzy.

Detailed conditions of door installation determine the manual attached to the product in the language of country of destination. Flagrant derogation from the rules of correct assembly of composite door may cause limitation or exclusion of manufacturer's warranty. Summarizing: the door installation should be made by trained and authorized installers and in accordance with the manufacturer's instructions.

Fulfillment of this requirement allows for full warranty protection and trouble-free operation of composite doors for many years.





PLEASE REMEMBER! Professional installation is a very important link that affects the safety, comfort and operation of composite doors VIKKING.

Recommended installation system of composite doors


Dedicated door assembly of Arctic Plus line

Dedicated door assembly of Arctic, Premium, Optimal, Interior line







Optimal anchorage points of doors and sidelights

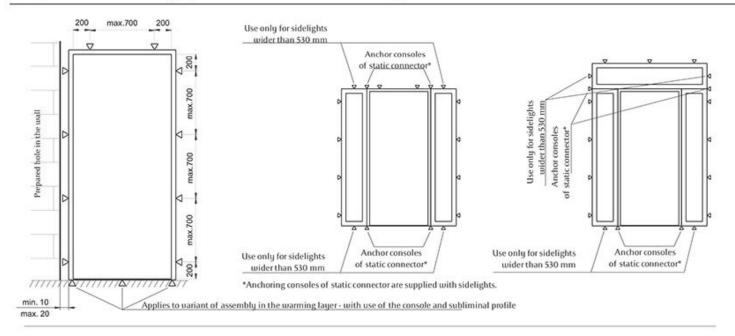

Recommended positioning of a door on subliminal profile and insulation of threshold section

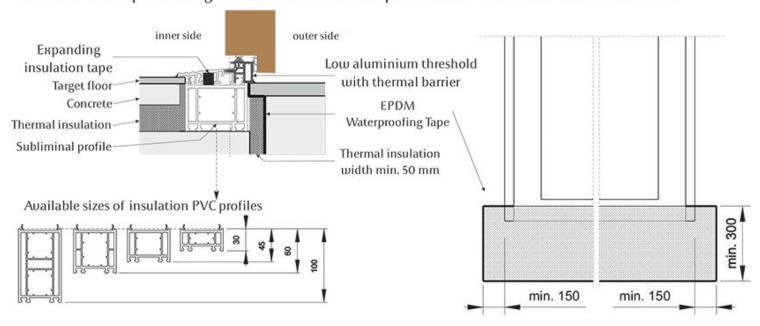

Hinge regulation instruction

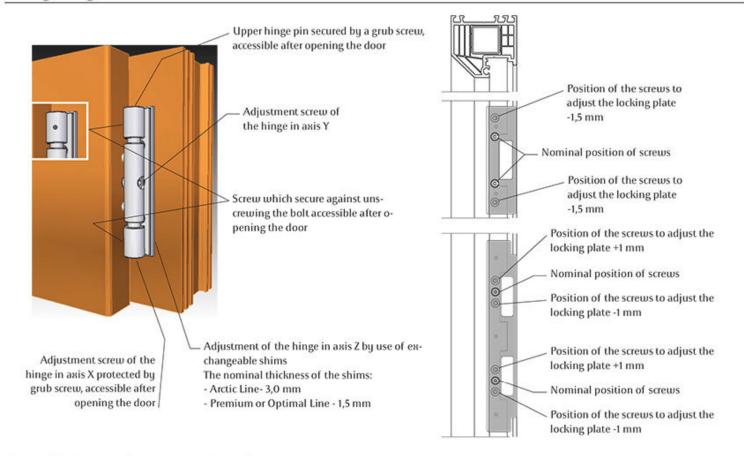

Conditions of composite doors use

Composite doors, unlike traditional doors do not corrode, are resistant to moisture and difficult climatic conditions. Painting of the door is primarily made to improve their aesthetic properties; possible damage to coating does not affect the technical durability of composite doors and door frames.

However, to extend the period of trouble-free service of fittings, sealings and coatings - we recommend the use of roofings which protects the door from the UV.

During intense solar radiation, doors in white color heat up to 45°C. In similar conditions the surface of the door in dark colors may exceed 75°C. In extreme conditions, especially from the southern side, composite sash may temporary deform but after the cessation of the cause will return to its original state. In such locations we recommend the use of roofing which protects the door in dark colors against excessive heating or use the door from the ARCTIC or ARCTIC Plus line.

Conditions of roofings:

ARCTIC PLUS line - optional;

ARCTIC line - optional;

PREMIUM line - required in dark colors of door installed on the southern wall of the building,

Lines: OPTIMAL; INTERIOR: mandatory.

Seals, fittings and moving parts of door, including the mechanisms of locks must be periodically checked and maintained according to the manufacturer's instructions - see: "Installation, use and maintenance of composite door" attached to the product.

Surfaces of glazings have coatings improving the protection against heat loss, for cleaning, use only agents exclusively dedicated to windows cleaning.

Elements made of stainless steel should not have prolonged contact with the standard steel, exhaust fumes and should not be used in areas with high salinity, such as in the vicinity of the sea. In these locations, we recommend the use of doors with composite frames.

Paint coatings of composite doors do not require maintenance; they should be periodically wiped with a damp microfiber cloth. Products from INOX should be periodically cleaned - their surface should be cleaned with use of preparations dedicated to stainless steel.

Dedicated preservatives are available at authorized points of sale.

Advantages of the system - notice the differences

If you are not sure, what you should pay attention to - compare the parameters of individual lines.

Pay particular attention to:

- ✓ durability confirmed by a written warranty of the manufacturer,
- ✓ resistance of doors to climatic conditions especially moisture,
- the insulation efficiency expressed by Ud factor the lower the value, the greater the protection against the loss of valuable energy,
- anti-theft security according to one applicable European standard RC 2
- ✓ available dimensions of doors and sidelights,
- equipment, coloring and stained glass decorations,

If you are still not convinced - personally compare parameters, durability and price of our door with any offer from another manufacturer.

Name		ARCTIC Plus	ARCTIC	PREMIUM	OPTIMAL	INTERIOR	X
Thermal insulation - W/	from 0,63 to 0,79	from 0,8 to 0,85	from 0,85 to 1,0	from 0,85 to 1,0	od 1,0 do 1,1		
Resistance to burglary class RC 2		S*	S*	S*	0	0	
The requirement of full	roofing	N/D	N/D	O**	W	W	
	Sash	25 years	25 years	20 years	15 years	15 lat	
	PVC door frame	10 years	10 years	10 years	10 years	10 lat	
Warranty	Paint coatings	5 years	5 years	5 years	5 years	5 lat	
	Other components	3 years	3 years	3 years	3 years	3 lata	
PVC door frame – 6-cha	mber class A+	S	S	S	S	S	
Meranti door frame		0	0	0	N/D	N/D	
Composite sash		68 mm	60 mm	45 mm	45 mm	45 mm	
SMOOTH door surface	0	0	0	N/D	N/D		
Real Wood door surface	(grain wood)	S	S	S	S	S	
	max 1095 mm x 2210 mm	S	N/D	N/D	N/D	N/D	
Doors in size XXL	max 1085 mm x 2200 mm	0	S	S	N/D	N/D	
The possibility of shortening and narrowing of the door		0	0	0	0	0	
Sidelights, top lights and doors according to individual projects		0	0	0	N/D	0	
Number of seals	3	2	2	2	3		
Low aluminum thresho	ld with thermal barrier	S	S	S	S	S	
3D adjustable hinges in color of the fittings with a set of security bolts		S	S	S	S	S	
3-point strip lock lockab	le by door handle	S	S	S	S	0	
3-point strip lock Autorr	S	S	0	N/D	N/D		
4-point strip lock lockab	0	0	0	0	0		
Adjustable locking plate	S	S	S	S	S		
Painting in full range of	S	S	S	S	S		
Painting in wood grain	S	S	S	0	0		
Multi-colored painting	0	0	0	N/D	0		
Triple glazed stained glas	N/D	S	S	0	0		
Quadruple glazing units	S	N/D	N/D	N/D	N/D		

S - standard

O - optional

W - required

N/D - not applicable

^{*}applies to full doors with security cylinders and door handles

^{**}recommended in the case of painting the doors in dark colors

Brand - guarantee of the promise fulfilment

"VIKKING Composite Doors" is a guarantee of the highest quality for generations

We have created from scratch innovative composite doors of the highest quality and durability.

Regardless of the statutory requirements of consumer protection in the form of warranty for faults and liability for nonconformity of the product with the agreement - we take the challenge of granting the extended warranty for trouble-free operation:

25 years - Composite sashes - ARCTIC PLUS and ARCTIC lines
 20 years - Composite sashes - PREMIUM line
 15 years - Composite sashes - OPTIMAL and INTERIOR lines
 10 years - PVC door frames, hinges and locking plates
 5 years - Paint coatings and stained glass units
 3 years - Stripe locks and technical efficiency of other components

Ensuring the technical functioning is conditioned by:

- I correct, adequate to operating conditions selection of doors lines and its equipment
- II the use of composite door in accordance with its intended use
- III the correct installation of the door by authorized installers with use of warm assembly according to the manufacturer's guidelines
- IV making periodic checks, adjustments and maintenance according to the manufacturer's guidelines
- V immediate removal of possible faults, that will protect against further damage of the door
- VI the use the door in the segment of individual housing construction, for other applications, apply the standard 3-year warranty

The full content of the guarantee and guidance on quality acceptance, correct installation, operation and maintenance we attach to each product in the language of country of destination.

We provide warranty and post-warranty service.





